


MERCEDES-BENZ SPRINTER

REAR DOOR LOWER STORAGE PANELS




Please read all steps before you begin. Installation of this product requires drilling through the first layer of sheet metal on the inside of your van doors. Take caution not to drill farther than about 3/8" or you risk drilling through the outside of the door. VanEssential is not responsible for any mistakes made.


What's Included:



1X Left Rear Door Storage Panel



1X Right Rear Door Storage Panel




1X Right Door Pocket



1X Left Door Pocket



T25 Screwdriver Bit



Sheet Metal Screws

You Will Need:



Power Drill




3/32" Steel Drill Bit with depth stop at 3/8"




A Friend

Right Side Panel


1. Pry the plastic door handle from the metal frame. Start by shifting the handle to the left and then pull it towards you from the top.

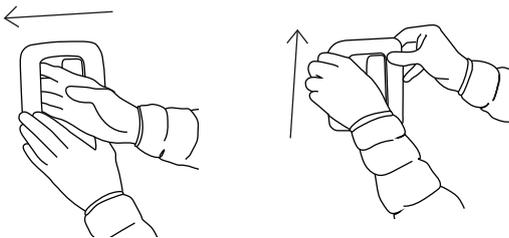


2. If applicable, remove all stock trim so that your door is in a bare metal frame state.




3. Have a friend help you hold up and align the panel to the window frame and thread the door handle through the panel hole. Push the door handle back into place, securing the panel into place.

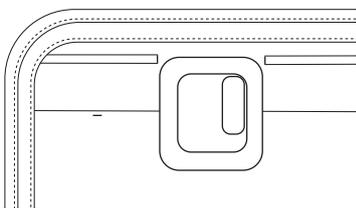


4. Have your friend place their hands on the left and right side of the panels to help provide stability to the panel.



5. Starting in the upper left-hand corner, identify a spot between the two outer seams and pre-drill a hole through the panel and into the van door.




6. Drive a screw into the hole, securing the panel in place.

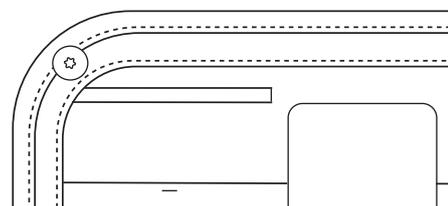


MERCEDES-BENZ SPRINTER REAR DOOR LOWER STORAGE PANELS

7. Repeat this process in each corner, and then add additional screws around the panel edge between the outer seams as needed for a secure fit. You will likely have leftover screws.

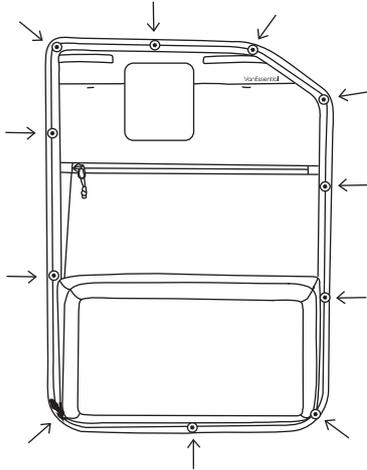


8. Step back and admire your work!

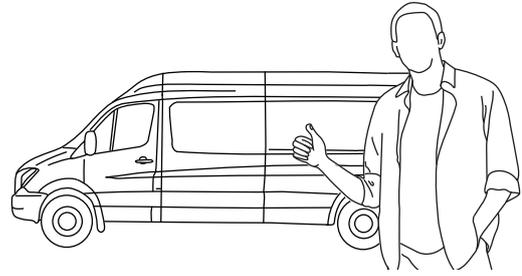


Right Pocket

NOTE: This pocket is optional and can be used for additional storage on your van door.


1. Hold up and align the pocket over the right side indentation. If your door doesn't have an indentation, align the pocket in the triangular extra space between the lower and middle part of your van door.

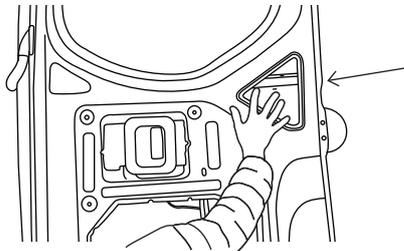


2. Starting on the top of the triangle, identify a spot between the two outer seams and pre-drill a hole through the pocket and into the van door.

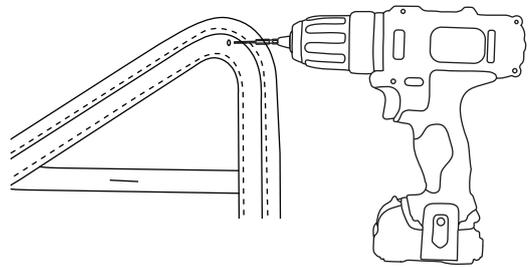

3. Drive a screw into the hole, securing the pocket in place.

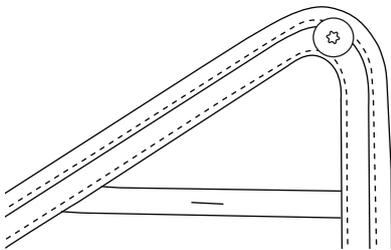


4. Repeat this process in each corner, and then add additional screws around the pocket edge between the outer seams as needed for a secure fit. You will likely have leftover screws.




Left Side Panel

1. If applicable, remove all plastic stock trim so that your door has the metal frame exposed.

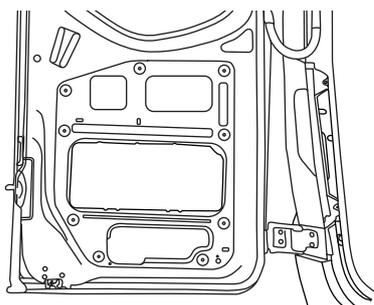


2. Have a friend help you hold up and align the panel to the window frame, placing their hands on the left and right side of the cover.

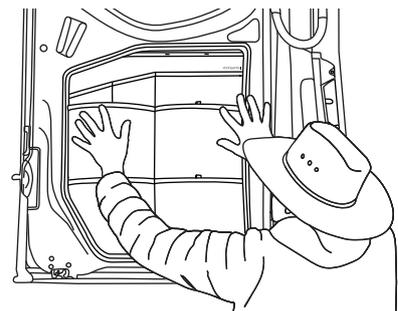


MERCEDES-BENZ SPRINTER REAR DOOR LOWER STORAGE PANELS


- 3.** Starting in the upper left-hand corner, identify a spot between the two outer seams and pre-drill a hole through the panel and into the van door.

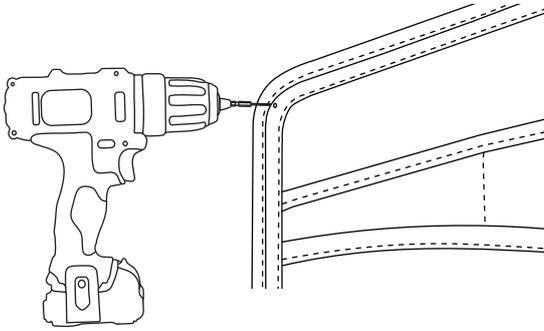


- 4.** Drive a screw into the hole, securing the panel in place.

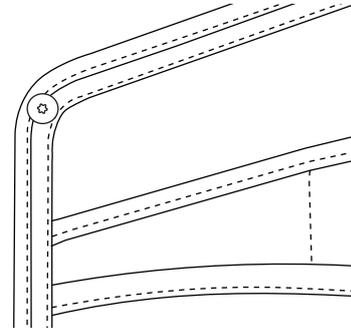

- 5.** Repeat this process in each corner, and then add additional screws around the panel edge between the outer seams as needed for a secure fit. You will likely have leftover screws.

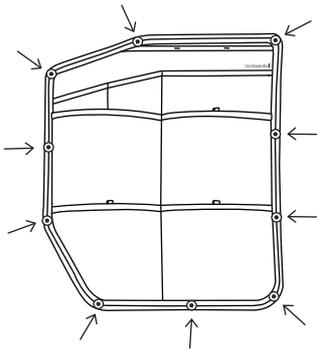


- 6.** Step back and admire your work!

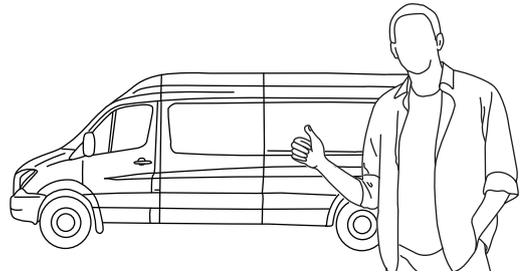


Left Pocket

NOTE: This pocket is optional and can be used for additional storage on your van door.


- 1.** Hold up and align the pocket over the right side indentation. If your door doesn't have an indentation, align the pocket in the triangular extra space between the lower and middle part of your van door.

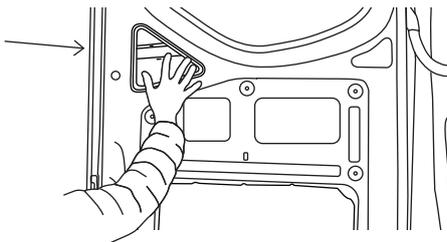

- 2.** Starting on the top of the triangle, identify a spot between the two outer seams and pre-drill a hole through the pocket and into the van door.

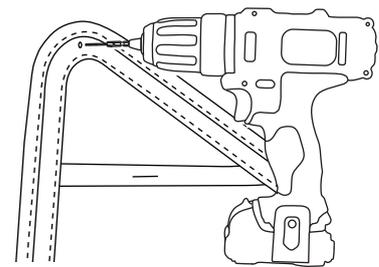

- 3.** Drive a screw into the hole, securing the pocket in place.

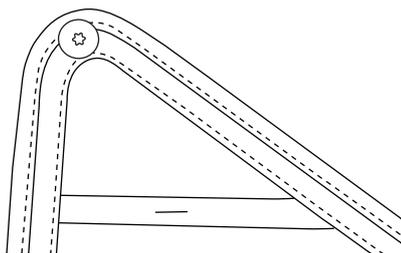

- 4.** Repeat this process in each corner, and then add additional screws around the pocket edge between the outer seams as needed for a secure fit. You will likely have leftover screws.

